

## CE RoHS EASCO® GTRN Releasable Cable Tie (GTRN可退式扎带)

Materials: UL approved Nylon 66 polyamide, 94V2.

Feature:


- Easily assembled by hand. The releasable cable tie features repeat use during applications.
- Applied in production and maintenance filed.
- Easy releasable by operating the finger catch of the nylon cable ties. One piece structure ensures stable quality.

Working Temperature: -40°C ~ +85°C


材质: 尼龙66, 耐燃等级UL94 V2.

特点:


- 可以轻松地解开和重复使用, 可应用于常需变更线材安装的研发、生产或维修领域。
  - 按压扎带头部延伸的卡齿, 可快速、轻松地解开扎带。一体成型的结构确保质量稳定可靠。
- 适用温度: -40°C~+85°C



Bundle Dia  
束径示意图



Push  
使用示意图

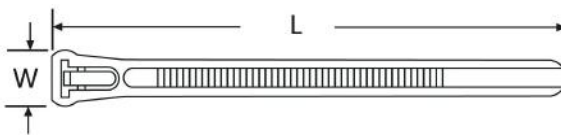

WXL

Article No.	Part No.	Length (L)	Width (W)	Tensile Strength kg(lbs)	Max Bundle Dia (E)
货号	型号	长度 (L)	宽度 (W)	拉力 kg(lbs)	最大束径 (E)
A0102.001.001	GTRN-100HD	100	7.6	22.2	20
A0102.001.002	GTRN-120HD	120	7.6	22.2	30
A0102.001.003	GTRN-150HD	150	7.6	22.2	35
A0102.001.004	GTRN-200HD	200	7.6	22.2	50
A0102.001.005	GTRN-250HD	250	7.6	22.2	66
A0102.001.006	GTRN-300HD	300	7.6	22.2	80
A0102.001.007	GTRN-370HD	370	7.6	22.2	102

## CE RoHS EASCO® GTM Mounting Cable Tie (GTM固定锁式扎带)

Materials: UL approved Nylon 66 polyamide, 94V2.

Feature:


- These screw mount cable ties have a built in mounting holes.
- Once fastened around the cables the bundle can be simply secured to the panel with a screw or bolt.

Color: All colors are available

材质: 尼龙66, 耐燃等级UL94 V2.


特点:

- 固定锁式束带头部的圆形孔, 可使用螺丝固定。
  - 在绑紧线材后, 再以螺丝将束带固定在基板上。
- 颜色: 各种颜色皆可订制



Bundle Dia  
束径示意图

Article No.	Part No.	Length (L)	Width (W)	Tensile Strength kg(lbs)	Max Bundle Dia (E)	Hole Dia (Φ)
货号	型号	长度 (L)	宽度 (W)	拉力 kg(lbs)	最大束径 (E)	孔径 (Φ)
A0102.002.001	GTM-110MC	110	2.5	8.1	22	Φ3.2
A0102.002.002	GTM-150IC	150	3.6	18.2	32	Φ4.2
A0102.002.003	GTM-200STC	200	4.8	22.2	50	Φ5.5
A0102.002.004	GTM-300STC	310	4.8	22.2	76	Φ5.5
A0102.002.005	GTM-370ST	377	4.8	22.2	102	Φ5.5
A0102.002.006	GTM-200HD	200	7.6	54.4	50	Φ5.7
A0102.002.007	GTM-300HD	313	7.6	54.4	76	Φ5.7



WXL