

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip


A17. Insulating Nut

A18. Nylon Cable Carrier

## CE RoHS EASCO® G Type Waterproof Nylon Cable Gland (G型尼龙电缆防水接头)



Materials: Nylon PA66 + EPDM Rubber.  
 Working Temperature: -40°C ~ +105°C. short time +160°C  
 Waterproof: IP68.  
 Color: White, Black, Other colors upon request.  
 Fire Resistant: UL94-V2.  
 材质: 尼龙PA66+EPDM橡胶.  
 工作温度: -40°C至105°C, 短时可达+160°C  
 防水等级: IP68.  
 颜色: 白色, 黑色, 可定制其他颜色.  
 阻燃等级: UL94-V2.

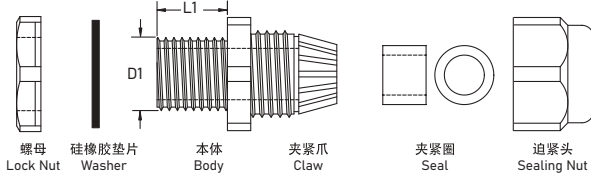


Article No.	Part No.	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size	Installing Hole
		Min Range 最小口径	Max Range 最大口径				
货号	型号			尾部直径 (D1)	尾长 (L1)	扳手尺寸	固定孔直径
A0107.004.0001	G1/4"	4	8	13.157	9	19	13.2~13.4
A0107.004.0002	G1/4"	3	5.5	13.157	9	19	13.2~13.4
A0107.004.0003	G3/8"	6	10	16.662	10	22/22	16.7~16.9
A0107.004.0004	G3/8"	4	7	16.662	10	22/22	16.7~16.9
A0107.004.0005	G1/2"	6	12	20.955	10	27/24	21~21.2
A0107.004.0006	G1/2"	5	9	20.955	10	27/24	21~21.2
A0107.004.0007	G3/4"	12.5	18	26.441	12	33/33	26.5~26.8
A0107.004.0008	G3/4"	7	13	26.441	12	33/33	26.5~26.8
A0107.004.0009	G1"	18	25	33.2	13.5	42/41	33.3~33.6
A0107.004.0010	G1"	8	12	33.2	13.5	42/41	33.3~33.6
A0107.004.0011	G1-1/4"	24	32	41.9	15	51/50	42~42.3
A0107.004.0012	G1-1/4"	18	25	41.9	16	51/50	42~42.3

## CE RoHS EASCO® NPT Type Waterproof Nylon Cable Gland (NPT型尼龙电缆防水接头)



Materials: Nylon PA66 + EPDM Rubber.  
 Working Temperature: -40°C ~ +105°C. short time +160°C  
 Waterproof: IP68.  
 Color: White, Black, Other colors upon request.  
 Fire Resistant: UL94-V2.  
 材质: 尼龙PA66+EPDM橡胶.  
 工作温度: -40°C至105°C, 短时可达+160°C  
 防水等级: IP68.  
 颜色: 白色, 黑色, 可定制其他颜色.  
 阻燃等级: UL94-V2.

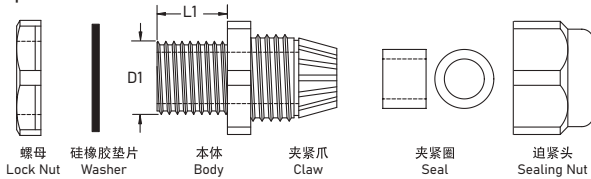

Article No.	Part No.	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size	Installing Hole
		Min Range 最小口径	Max Range 最大口径				
货号	型号			尾部直径 (D1)	尾长 (L1)	扳手尺寸	固定孔直径
A0107.005.0001	NPT1/4"	4	8	13.157	9	19	-
A0107.005.0002	NPT1/4"	3	5.5	13.157	9	19	-
A0107.005.0003	NPT3/8"	6	10	16.662	10	22	-
A0107.005.0004	NPT3/8"	4	7	16.662	10	22	-
A0107.005.0005	NPT1/2"	6	12	20.955	10	27	-
A0107.005.0006	NPT1/2"	5	9	20.955	10	27	-
A0107.005.0007	NPT3/4"	12.5	18	26.441	15	33	-
A0107.005.0008	NPT3/4"	7	13	26.441	15	33	-
A0107.005.0009	NPT1"	18	25	33.5	17	41	-
A0107.005.0010	NPT1"	8	12	33.5	17	41	-
A0107.005.0011	NPT1-1/4"	24	32	42	17	50	-
A0107.005.0012	NPT1-1/4"	18	25	42	17	50	-