


CE RoHS EASCO® Nylon Cable Gland With Strain Relief (耐扭式电缆接头)



Materials: Nylon PA66 + EPDM Rubber.
 Working Temperature: -40°C ~ +105°C. short time +160°C
 Waterproof: IP68.
 Color: White, Black, Other colors upon request.
 Fire Resistant: UL94-V2.
 材质: 尼龙PA66+EPDM橡胶.
 工作温度: -40°C至105°C, 短时可达+160°C
 防水等级: IP68.
 颜色: 白色, 黑色, 可定制其他颜色.
 阻燃等级: UL94-V2.

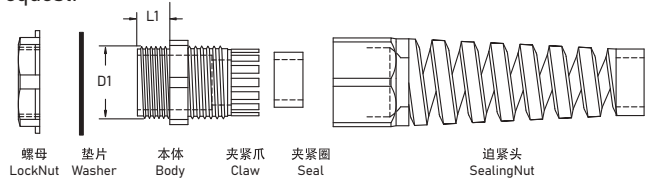

Article No. 货号	Part No. 型号	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size 扳手尺寸	Installing Hole 固定孔直径
		Min Range 最小口径	Max Range 最大口径	尾部直径 (D1)	尾长 (L1)		
A0107.006.0001	PG7	3	6.5	12.5	8	19/15	12.5~12.8
A0107.006.0002	PG7	3	5.5	12.5	9	19/19	12.5~12.8
A0107.006.0003	PG7	4	8	12.5	9	19/19	12.5~12.8
A0107.006.0004	PG9	4	8	15.2	9	22/19	15.2~15.5
A0107.006.0005	PG9	3	5.5	15.2	9	22/19	15.2~15.5
A0107.006.0006	PG11	6	10	18.6	9	24/22	18.6~18.9
A0107.006.0007	PG11	4	7	18.6	9	24/22	18.6~18.9
A0107.006.0008	PG13.5	7	12	20.4	9	27/24	20.4~20.7
A0107.006.0009	PG13.5	5	9	20.4	9	27/24	20.4~20.7
A0107.006.0010	PG16	8.5	14	22.5	10	30/27	22.5~22.8
A0107.006.0011	PG16	7	11	22.5	10	30/27	22.5~22.8
A0107.006.0012	PG21	12	18	28.3	10	35/33	28.3~28.7
A0107.006.0013	PG21	11	16	28.3	10	35/33	28.3~28.7
A0107.006.0014	M12X1.5	4	8	12	9	19/18	12~12.3
A0107.006.0015	M12X1.5	3	6.5	12	8	18/16	12~12.3
A0107.006.0016	M12X1.5	3	5.5	12	9	19/18	12~12.3
A0107.006.0017	M16X1.5	6	10	16	9	22/22	16~16.3
A0107.006.0018	M16X1.5	4	8	16	9	22/19	16~16.3
A0107.006.0019	M16X1.5	3	5.5	16	9	22/19	16~16.3
A0107.006.0020	M18X1.5	6	10	18	9	24/22	18~18.3
A0107.006.0021	M18X1.5	4	8	18	9	24/22	18~18.3
A0107.006.0022	M20X1.5	8.5	14	20	10	27/27	20~20.3
A0107.006.0023	M20X1.5	5	11	20	10	27/27	20~20.3
A0107.006.0024	M20X1.5	7	12.5	20	9	27/24	20~20.3
A0107.006.0025	M25X1.5	12.5	18	25	10	33/33	25~25.4
A0107.006.0026	M25X1.5	7	13	25	10	33/27	25~25.4
A0107.006.0027	PG7	3	6.5	12.5	15	19/15	12.5~12.8
A0107.006.0028	PG7	3	5.5	12.5	15	19/19	12.5~12.8
A0107.006.0029	PG7	4	8	12.5	15	19/15	12.5~12.8
A0107.006.0030	PG9	4	8	15.2	15	22/19	15.2~15.5
A0107.006.0031	PG9	3	5.5	15.2	15	22/19	15.2~15.5
A0107.006.0032	PG11	6	10	18.6	15	24/22	18.6~18.9
A0107.006.0033	PG11	4	7	18.6	15	24/22	18.6~18.9
A0107.006.0034	PG13.5	7	12	20.4	15	27/24	20.4~20.7
A0107.006.0035	PG13.5	5	9	20.4	15	27/24	20.4~20.7
A0107.006.0036	PG16	8.5	14	22.5	15	30/27	22.5~22.8
A0107.006.0037	PG16	7	11	22.5	15	30/27	22.5~22.8
A0107.006.0038	PG21	12	18	28.3	15	35/33	28.3~28.7
A0107.006.0039	PG21	11	16	28.3	15	35/33	28.3~28.7
A0107.006.0040	G1/4	4	8	13.157	9	19	13.2~13.4
A0107.006.0041	G1/4	3	5.5	13.157	9	19	13.2~13.4
A0107.006.0042	G3/8	6	10	16.662	10	22/22	16.7~16.9
A0107.006.0043	G3/8	4	7	16.662	10	22/22	16.7~16.9
A0107.006.0044	G1/2	6	12	20.955	10	27/24	21~21.2

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

A1. Wiring Ducts

A2. Cable Ties


A3. Din Rails

A4. Cable Markers

CE RoHS EASCO® Nylon Cable Gland With Strain Relief (耐扭式电缆接头)



Materials: Nylon PA66 + EPDM Rubber.
 Working Temperature: -40°C ~ +105°C, short time +160°C
 Waterproof: IP68.
 Color: White, Black, Other colors upon request.
 Fire Resistant: UL94-V2.
 材质: 尼龙PA66+EPDM橡胶.
 工作温度: -40°C至105°C, 短时可达+160°C
 防水等级: IP68.
 颜色: 白色, 黑色, 可定制其他颜色.
 阻燃等级: UL94-V2.

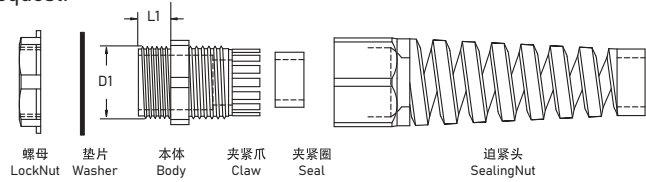

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier

Article No.	Part No.	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size	Installing Hole
		Min Range 最小口径	Max Range 最大口径	尾部直径 (D1)	尾长 (L1)		
货号	型号					扳手尺寸	固定孔直径
A0107.006.0045	G1/2	5	9	20.955	10	27/24	21~21.2
A0107.006.0046	G3/4	12.5	18	26.441	12	33/33	26.5~26.8
A0107.006.0047	G3/4	7	13	26.441	12	33/33	26.5~26.8
A0107.006.0048	M12X1.5	3	6.5	12	15	18/16	12~12.3
A0107.006.0049	M12X1.5	3	5.5	12	15	19/18	12~12.3
A0107.006.0050	M16X1.5	4	8	16	15	22/19	16~16.3
A0107.006.0051	M16X1.5	6	10	16	15	22/22	16~16.3
A0107.006.0052	M16X1.5	3	5.5	16	15	22/19	16~16.3
A0107.006.0053	M18X1.5	6	10	18	15	24/22	18~18.3
A0107.006.0054	M18X1.5	3	7	18	15	24/19	18~18.3
A0107.006.0055	M20X1.5	8.5	14	20	15	27/27	20~20.3
A0107.006.0056	M20X1.5	7	12.5	20	15	27/24	20~20.3
A0107.006.0057	M20X1.5	5	10	20	15	27/24	20~20.3
A0107.006.0058	M25X1.5	12.5	18	25	15	33/33	25~25.4
A0107.006.0059	M25X1.5	9	16	25	15	33/33	25~25.4
A0107.006.0060	NPT1/4	4	8	13.157	9	19	-
A0107.006.0061	NPT1/4	3	5.5	13.157	9	19	-
A0107.006.0062	NPT3/8	6	10	16.662	10	22	-
A0107.006.0063	NPT3/8	4	7	16.662	10	22	-
A0107.006.0064	NPT1/2	6	12	20.955	10	27	-
A0107.006.0065	NPT1/2	5	9	20.955	10	27	-
A0107.006.0066	NPT3/4	12.5	18	26.441	15	33	-
A0107.006.0067	NPT3/4	7	13	26.441	15	33	-
A0107.006.0068	NPT1	18	25	33.5	17	41	-
A0107.006.0069	NPT1	8	12	33.5	17	41	-
A0107.006.0070	NPT1-1/4	24	32	42	17	50	-
A0107.006.0071	NPT1-1/4	18	25	42	17	50	-