

CE RoHS EASCO® Nylon Cable Porous Joint (Split Type) (尼龙电缆多孔接头(分体型))




Materials: Nylon PA66 + EPDM Rubber.
 Working temperature: -40°C to 100°C in static state . or instantaneous heat resistance up to 120°C;
 -20°C to 80°C in dynamic state, or instantaneous heat resistance up to 100°C

Thread: Metric. PG. G (PF). and NPT thread.
 Color: Black(RAL9005).Gray(RAL7035).other color available upon request.
 Waterproof: IP68-10 Bar.

Features: The claws and seals of excel lent design.sealing nut have a“click”sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water. weak acid, alcohol. oil.grease and common solvency.

材质: 尼龙PA66+EPDM橡胶。
 螺牙规格:公制牙 (Metric) PG牙、G (PF)牙、NPT牙。
 工作温度:静态 -40°C至 100 或瞬间可耐热至 120 ;
 动态-20 至 80°C, 或瞬间可耐热至100°C。
 颜色种类:黑色、灰色,其它颜色可定做。
 防护等级:P68-10
 产品特性:特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大,
 抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂 及一般溶剂。

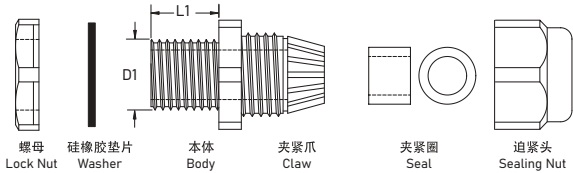

Article No.	Part No.	Thread	Porous Spec	Cable Range	Thread O.D.	Thread Length	Spanner Size	Pkg Qty (pcs)	
货号	型号	螺牙规格	多孔规格	电缆范围	螺纹外径	螺纹长度	扳手直径	包装数 (个)	
A0107.009.0001	M12A-H2-03	M12	2 孔 2 Holes	3-1.2	12	9	18/19	50	
A0107.009.0002	M16A-H2-04	M16		4-1.6	16	15	22/22	50	
A0107.009.0003	M20A-H2-03	M20		3.5-2	20	15	27/27	50	
A0107.009.0004	M20A-H2-06	M20		6-2.5	20	15	27/27	50	
A0107.009.0005	M25A-H2-05	M25		5-2	25	15	33/33	50	
A0107.009.0006	M25A-H2-08	M25		8.7-4.5	25	15	33/33	50	
A0107.009.0007	M32-H2-10	M32		10-5	32	15	41/41	50	
A0107.009.0008	M12A-H3-02	M12		3 孔 3 Holes	2.6-1.2	12	9	18/19	20
A0107.009.0009	M16A-H3-4	M16	4.1.6		16	15	22/22	20	
A0107.009.0010	M20A-H3-3	M20	3.5-1.5		20	15	27/27	12	
A0107.009.0011	M20A-H3-5	M20	5-2		20	15	27/27	12	
A0107.009.0012	M25A-H3-5	M25	5-2		25	15	33/33	50	
A0107.009.0013	M25A-H3-8	M25	8-4		25	15	33/33	50	
A0107.009.0014	M32A-H3-10	M32	10-5		32	15	41/41	50	
A0107.009.0015	M12A-H4-2	M12	4 孔 4 Holes		2.3-1	12	9	18/19	50
A0107.009.0016	M16A-H4-3	M16		3-1.2	16	15	22/22	50	
A0107.009.0017	M20A-H4-3	M20		3.5-1.5	20	15	27/27	50	
A0107.009.0018	M20A-H4-4	M20		4.5-2	20	15	27/27	50	
A0107.009.0019	M25A-H4-5	M25		5-2	25	15	33/33	50	
A0107.009.0020	M25A-H4-7	M25		7-3.5	25	15	33/33	20	
A0107.009.0021	M32-H4-9	M32		9-4.5	32	15	41/41	20	
A0107.009.0022	M16A-H5-02	M16		5 孔 5 Holes	2.5-1	16	15	22/22	20~20.3
A0107.009.0023	M20A-H5-3	M20	3-1.2		20	15	27/27	20~20.3	
A0107.009.0024	M20A-H5-4	M20	4.2-1.7		20	15	27/27	20~20.3	
A0107.009.0025	M25A-H5-3	M25	3.5-1.5		25	15	33/33	25~25.4	
A0107.009.0026	M25A-H5-6	M25	6-3		25	15	33/33	25~25.4	
A0107.009.0027	M32A-H5-8	M32	8-4		32	15	41/41	12.5~12.8	
A0107.009.0028	M16-H6-2	M16	6 孔 6 Holes		2-1	16	15	22/22	12.5~12.8
A0107.009.0029	M20A-H6-3	M20			3-1.2	20	15	27/27	12.5~12.8
A0107.009.0030	M25A-H6-3	M25		3.5-1.5	25	15	33/33	15.2~15.5	
A0107.009.0031	25A-H6-5	M25		5.3-2.4	25	15	33/33	15.2~15.5	
A0107.009.0032	M32A-H6-7	M32		7-3.5	32	15	41/41	18.6~18.9	
A0107.009.0033	M20A-H7-3	M20		7 孔 7 Holes	3-1.2	20	15	27/27	18.6~18.9
A0107.009.0034	M25-H7-3	M25			3.5-1.5	25	15	33/33	20.4~20.7
A0107.009.0035	M32A-H7-6	M32			6-3	32	15	41/41	20.4~20.7
A0107.009.0036	M20A-H8-2	M20	8 孔 8 Holes	2.8-1	20	15	27/27	22.5~22.8	
A0107.009.0037	M25A-H8-3	M25		3.5-1.5	25	15	33/33	22.5~22.8	

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier

CE RoHS EASCO® Nylon Cable Porous Joint (Split Type) (尼龙电缆多孔接头(分体型))



Materials: Nylon PA66 + EPDM Rubber.
 Working temperature: -40°C to 100°C in static state . or instantaneous heat resistance up to 120°C;
 -20°C to 80°C in dynamic state, or instantaneous heat resistance up to 100°C

Thread: Metric. PG. G (PF). and NPT thread.
 Color: Black(RAL9005).Gray(RAL7035).other color available upon request.


Waterproof: IP68-10 Bar.

Features: The claws and seals of excel lent design.sealing nut have a "click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water. weak acid, alcohol. oil.grease and common solvency.

材质: 尼龙PA66+EPDM橡胶.
 螺牙规格: 公制牙 (Metric) PG牙、G (PF)牙、NPT牙。
 工作温度: 静态 -40°C至 100 或瞬间可耐热至 120 ;
 动态 -20 至 80°C, 或瞬间可耐热至100°C。
 颜色种类: 黑色、灰色, 其它颜色可定做。

防护等级: P68-10

产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂 及一般溶剂。

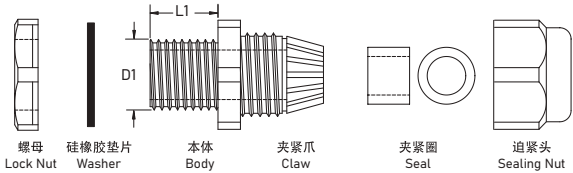

Article No.	Part No.	Thread	Porous Spec	Cable Range	Thread O.D.	Thread Length	Spanner Size	Pkg Qty (pcs)
货号	型号	螺牙规格	多孔规格	电缆范围	螺纹外径	螺纹长度	扳手直径	包装数 (个)
A0107.009.0038	M16A-0610	M16	扁孔 Flat Hole	6*10	16	15	22/22	50
A0107.009.0039	M20A-06128	M20		6.5*12	20	15	27/27	50
A0107.009.0040	M20A-06148	M20		6*14	20	15	27/27	50
A0107.009.0041	M20A-07128	M20		7*12	20	15	27/27	50
A0107.009.0042	M20A-07148	M20		7*14	20	15	27/27	50
A0107.009.0043	M25A-06148	M25		6*14	25	15	33/33	50
A0107.009.0044	M25A-0714	M25		7*14	25	15	33/33	50
A0107.009.0045	M32A-0822	M32		8*22	32	15	41/41	20
A0107.009.0046	M40A-10288	M40		10*28.5	40	20	50/50	10
A0107.009.0047	M40A-0529	M40		5.5*29	40	20	50/50	10