

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut


A18. Nylon Cable Carrier

## CE RoHS EASCO® Omega2 Steel Din Rail (Omega2钢制导轨)



Materials(材质): Galvanized steel(钢制).  
 Zinc plating color(镀锌颜色): Blue white or Yellow , optional.(蓝白锌、彩锌可选)  
 Size(尺寸):35x7.5mm  
 Features(产品特征):

- The guide rail makes the installation of electrical equipment significantly faster and easier than installing individual components on the cabinet body.(导轨使电气设备的安装比在机柜主体上安装单个组件明显更快、更容易。)
- The guide rail helps save space in electrical panels and junction boxes by reducing the number of required installation hardware.(导轨通过减少所需的安装硬件数量来帮助节省电气面板和接线盒中的空间。)
- The guide rail provides a universal standard that most circuit breakers, PLCs, and wiring terminals are designed to meet.  
 (导轨提供了一个通用标准,大多数断路器、PLC和接线端子的设计都符合该标准。)
- The rails allow for easy installation and uninstallation of components.  
 It is also much easier to make minor adjustments to the position of the guide rail installation components.  
 (导轨允许轻松安装和卸载组件。对导轨安装组件的位置进行细微调整也容易得多。)
- Guides help simplify wiring design by providing centralized locations through which wiring and connectors can pass.  
 (导轨通过提供布线和连接器可以穿过的集中位置来帮助简化布线设计。)

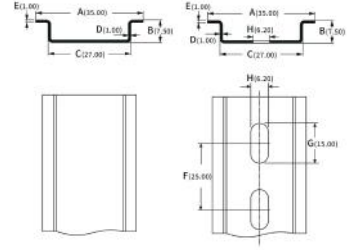

Article No.	Part No.	Stud Size	Dimension( 尺寸 )								Length (pcs)	Pkg Qty (pcs)
			A	B	C	D	E	F	G	H		
货号	型号	产品特征	A	B	C	D	E	F	G	H	长度 ( 根 )	包装数 ( 根 )
A0103.001.0001	OMEGA2	Nonporous environment-friendly blue-white zinc 无孔环保蓝白锌	35	7.5	27	1	1				1m,2m	50
A0103.001.0002	OMEGA2ST(6.2X15)	Porou environment-friendly blue-white zinc 有孔环保蓝白锌	35	7.5	27	1	1	25	15	6.2	1m,2m	50
A0103.001.0003	OMEGA2ST(5.2X25)		35	7.5	27	1	1	35.5	25	5.2	1m,2m	50
A0103.001.0004	OMEGA2ST(5.2X15)		35	7.5	27	1	1	25	15	5.2	1m,2m	50
A0103.001.0005	OMEGA2ST(4.2X15)		35	7.5	27	1	1	25	15	4.2	1m,2m	50
A0103.001.0006	OMEGA2ST(5.3X18)		35	7.5	27	1	1	25	18	5.3	1m,2m	50
A0103.001.0007	OMEGA2ST(4.2X12)		35	7.5	27	1	1	20	12	4.2	1m,2m	50
A0103.001.0008	OMEGA2ST(6.3X18)		35	7.5	27	1	1	25	18	6.3	1m,2m	50
A0103.001.0009	OMEGA2		Non-porous colored zinc 无孔彩锌	35	7.5	27	1	1				1m,2m
A0103.001.0010	OMEGA2ST(6.2X15)	Perforated colored zinc 有孔彩锌	35	7.5	27	1	1	25	15	6.2	1m,2m	50
A0103.001.0011	OMEGA2ST(5.2X25)		35	7.5	27	1	1	35.5	25	5.2	1m,2m	50
A0103.001.0012	OMEGA2ST(5.2X15)		35	7.5	27	1	1	25	15	5.2	1m,2m	50
A0103.001.0013	OMEGA2ST(4.2X15)		35	7.5	27	1	1	25	15	4.2	1m,2m	50
A0103.001.0014	OMEGA2ST(5.3X18)		35	7.5	27	1	1	25	18	5.3	1m,2m	50
A0103.001.0015	OMEGA2ST(4.2X12)		35	7.5	27	1	1	20	12	4.2	1m,2m	50
A0103.001.0016	OMEGA2ST(6.3X18)		35	7.5	27	1	1	25	18	6.3	1m,2m	50
A0103.001.0017	OMEGA2	Non-porous Stainless Steel 无孔不锈钢	35	7.5	27	1	1				1m,2m	50
A0103.001.0018	OMEGA2ST	Perforated Stainless Steel 有孔不锈钢	35	7.5	27	1	1	25	15	6.2	1m,2m	50

