

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip


A17. Insulating Nut

A18. Nylon Cable Carrier

## CE RoHS EASCO® M Type Waterproof Nylon Cable Gland (M型尼龙电缆防水接头)



Materials: Nylon PA66 + EPDM Rubber.  
 Working Temperature: -40°C ~ +105°C. short time +160°C  
 Waterproof: IP68.  
 Color: White, Black, Other colors upon request.  
 Fire Resistant: UL94-V2.  
 材质: 尼龙PA66+EPDM橡胶。  
 工作温度: -40°C至105°C, 短时可达+160°C  
 防水等级: IP68。  
 颜色: 白色, 黑色, 可定制其他颜色。  
 阻燃等级: UL94-V2.

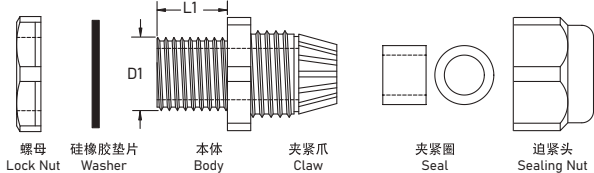

Article No.	Part No.	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size 扳手尺寸	Installing Hole 固定孔直径
		Min Range 最小口径	Max Range 最大口径	尾部直径 (D1)	尾长 (L1)		
A0107.000.0001	M8X1.25	2	5	8	7.5	13/12	8~8.3
A0107.000.0002	M10X1.5	3	6	10	8	15/12	10~10.3
A0107.000.0003	M12X1.5	4	8	12	9	19/18	12~12.3
A0107.000.0004	M12X1.5	3	6.5	12	8	18/16	12~12.3
A0107.000.0005	M12X1.5	3	5.5	12	9	19/18	12~12.3
A0107.000.0006	M16X1.5	6	10	16	9	22/22	16~16.3
A0107.000.0007	M16X1.5	4	8	16	9	22/19	16~16.3
A0107.000.0008	M16X1.5	3	5.5	16	9	22/19	16~16.3
A0107.000.0009	M18X1.5	6	10	18	9	24/22	18~18.3
A0107.000.0010	M18X1.5	4	8	18	9	24/22	18~18.3
A0107.000.0011	M20X1.5	8.5	14	20	10	27/27	20~20.3
A0107.000.0012	M20X1.5	5	11	20	10	27/27	20~20.3
A0107.000.0013	M20X1.5	7	12.5	20	9	27/24	20~20.3
A0107.000.0014	M25X1.5	12.5	18	25	10	33/33	25~25.4
A0107.000.0015	M25X1.5	7	13	25	10	33/27	25~25.4
A0107.000.0016	M32X1.5	18	25	32	12	41/41	32~32.4
A0107.000.0017	M32X1.5	14	22	32	12	41/41	32~32.4
A0107.000.0018	M40X1.5	24	32	40	15	50/50	40~40.4
A0107.000.0019	M40X1.5	18	25	40	15	50/50	40~40.4
A0107.000.0020	M50X1.5	31	41	50	20	62/62	50~50.4
A0107.000.0021	M50X1.5	25	32	50	20	62/62	50~50.4
A0107.000.0022	M63X1.5	35	45	63	20	75/65	63~63.4
A0107.000.0023	M63X1.5	29	38	63	20	75/65	63~63.4